


STANDARD ROTATION
 PORT A PRESSURIZED - CW
 PORT B PRESSURIZED - CCW
 STD DRILLS USE CCW

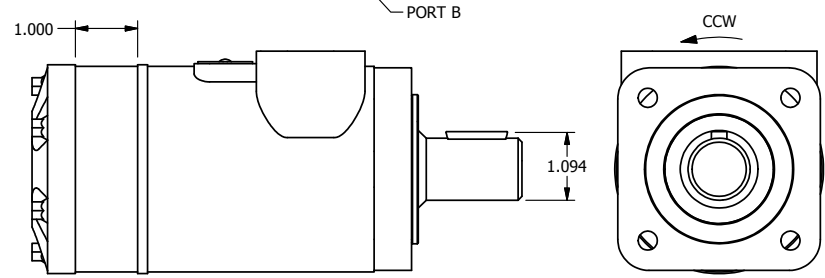

NOTES:
 1) MOTORS COME WITH A J-310 KEY.

FLG	QTY	PART NO	DESCRIPTION
4	1	J-5307	RING - CHAR LYNN ADAPTOR, JIFFY TAP
3	2	J-281	SCREW DRIVE #4 X 1/4" ROUND HEAD 18-8 SS.
2	1	J-289	NAMEPLATE, HYD MOTOR
1	1	B-5-R	MOTOR, CHAR-LYNN SERIES H 101-1005-009 (1 GEROTOR)

LIMITS ON DIMENSIONS
 UNLESS OTHERWISE SPECIFIED
 2-PL DECIMAL ± .01
 3-PL DECIMAL ± .005
 FRACTIONAL ± 1/64
 ANGULAR ± 1/2°



DRAWN: RMckenna	DATE: 8/5/2012	CHECKED: KWaite	DATE: 10/9/2012
SCALE: None	SHEET: 1 OF 1	RELEASED: HWomack	DATE: 10/9/2012

TITLE: B-SERIES MOTOR ASSEMBLY, 11.3 CU. IN. PER REV., JIFFY TAP & DRILL	PART NO.: B-5	REV.:
---	------------------	-------

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

P:\Engineering\Inventory Files\Internal Drawings\Hyd Motor\B-5.dwg