



NOTES:  
 1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
 2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID OPERATOR WITH OPERATOR LISTED IN TABLE BELOW.

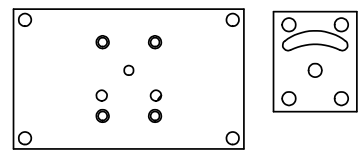


ALIGN HOLES IN GASKET AS SHOWN.  
 FOR EXTERNAL PILOT PRESSURE, REMOVE PIGGY BACK BLOCK AND ROTATE 180°. LEAVE GASKET AS SHOWN. REMOVE 1/8" PLUG AND CONNECT SUPPLY PRESSURE - 160 PSI MAX.

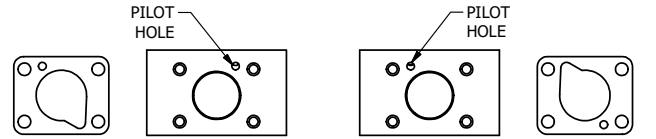

POSITION GASKET TO SEAL PILOT HOLE ON SIDE 'B' AS SHOWN. ALIGN PILOT HOLE AND CENTER CUTOUT ON SIDE 'A' AS SHOWN.

|     |     |           |   |
|-----|-----|-----------|---|
| 17  | 2   | V-212     | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL        |
| 16  | 1   | AN-115    | NAMEPLATE, BLANK, FOR HE,KE,RR,D,CR,PP,SR,SS VALVES               |
| 15  | 1   | V-19      | PLUG, SOCKET PIPE 1/8" NPT, 7/8 TAPER, FLUSH SEAL                 |
| 14  | 1   | PEC3-5    | END CAP, INDICATOR PIN, WIPER CAVITY, 6061-T6, 1/4" & 3/8" VALVE  |
| 13  | 1   | PIK3      | PIN, SPOOL OVERRIDE, 303 STAINLESS, 1/4" & 3/8" VALVES            |
| 12  | 1   | V-78      | U-CUP, 1/2 X 1/4 X 1/8, NITRILE                                   |
| 11  | 1   | V-119     | RING,CIRCULAR PUSH ON TYPE FOR INDICATOR PIN                      |
| 10  | 1   | AY-38X-11 | CLASSIC SOLENOID - EXPLOSION PROOF, 120/60VAC, 38.5VDC, 110/50VAC |
| 9   | 4   | V-1       | SCREW, 10-24 X 2, SOCKET HEAD CAP                                 |
| 8   | 1   | PB3-1E    | ADAPTOR - SINGLE SOLENOID, 1/4" & 3/8" VALVES                     |
| 7   | 1   | PBG3-1    | GASKET - PIGGY BACK, SINGLE SOLENOID, 1/4" & 3/8" VALVE           |
| 6   | 1   | S3R       | SPOOL - SOLID, STANDARD, 2 POS, CLSD CTR, 1/4" & 3/8" VALVE       |
| 5   | 1   | PEC3      | END CAP, PILOT, 300 AL, 1/4" & 3/8" VALVE                         |
| 4   | 8   | V-38      | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                               |
| 3   | 2   | ECG3      | GASKET - END CAP, 1/4" & 3/8" VALVE                               |
| 2   | 6   | V-39      | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                       |
| 1   | 1   | B3-6E     | BODY - SOLID, PIGGY BACK, ANODIZED, 3/8" SIDE PORT VALVE          |
| FLG | QTY | PART NO   | DESCRIPTION   |

SECTION A-A  
 VIEW FROM 3 PORT SIDE



| OPERATOR VOLTAGES |                  |
|-------------------|------------------|
| PART NO           | REPLACE OPERATOR |
| SR3XK 240/60      | AY-38X-17        |
| SR3XK 24VDC       | AY-38X-8         |
| SR3XK 12VDC       | AY-38X-5         |

|  |                 |  |  |
|--|-----------------|--|--|
| LIMITS ON DIMENSIONS UNLESS OTHERWISE SPECIFIED  |                 | 2-PL DECIMAL ± .01<br>3-PL DECIMAL ± .005<br>FRACTIONAL ± 1/64<br>ANGULAR ± 1/2° | <b>AAA PRODUCTS INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |
| DRAWN: RMckenna  | DATE: 3/14/2016 | CHECKED: KWaite  |  |
| SCALE: 1 : 1   | SHEET: 1 OF 1   | RELEASED: HWomack  | DATE: 3/14/2016  |
| TITLE:<br>3/8" SIDE PORT, SNGL SOL, 2 POS, PILOT RTRN, EXPL PROOF, 120/60, THREADED INDICATOR PIN                                    |                 |  | PART NO.:<br>SR3XK   |
| THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT |                 |  | REV.:  |