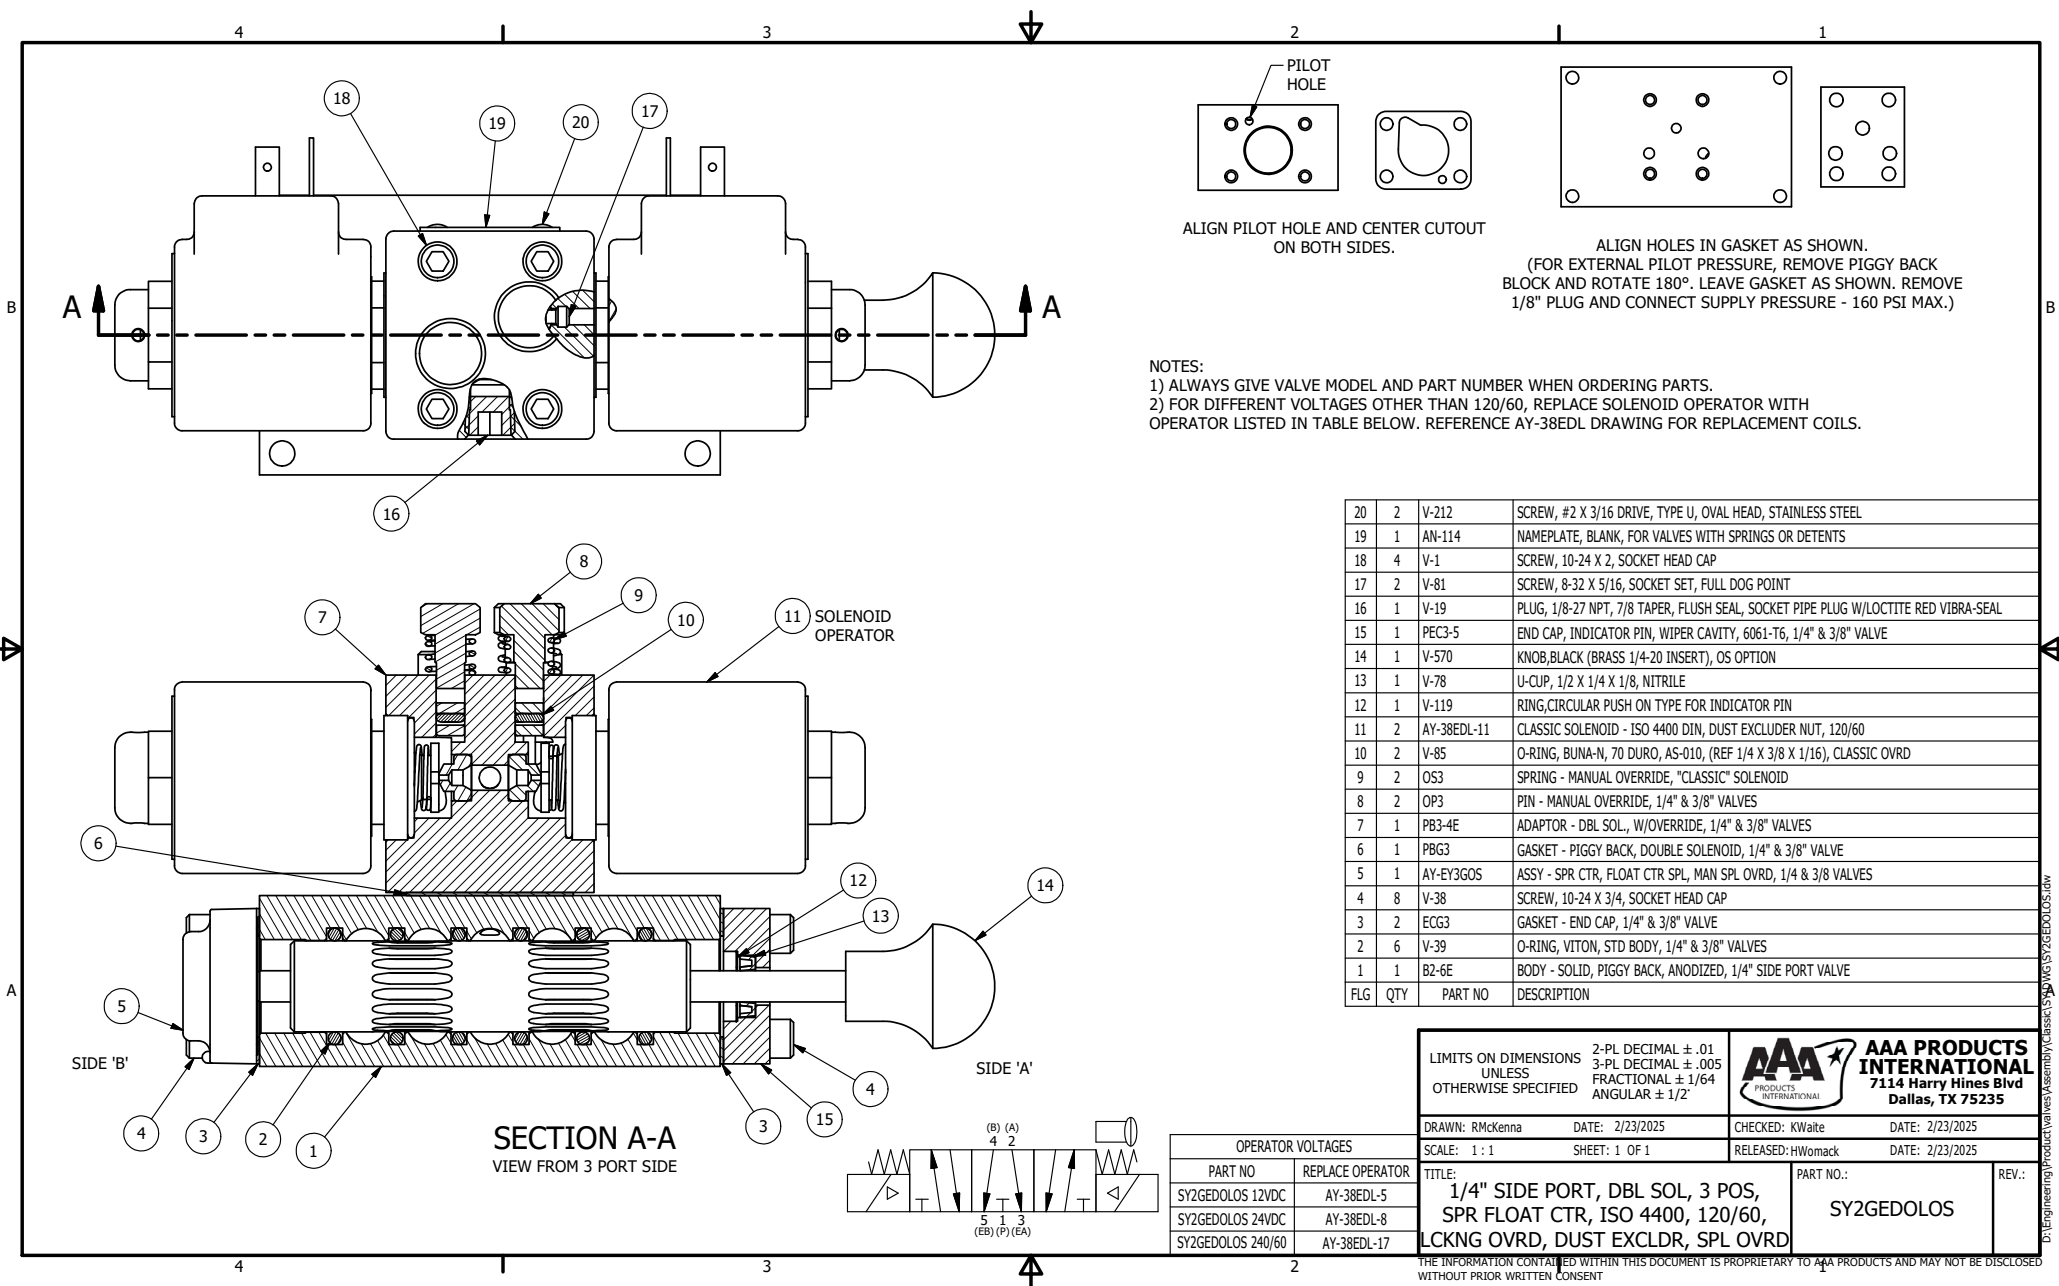


**NOTES:**  
1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID OPERATOR WITH OPERATOR LISTED IN TABLE BELOW. REFERENCE AY-38EDL DRAWING FOR REPLACEMENT COILS.

|     |     |             |                                                                                    |
|-----|-----|-------------|------------------------------------------------------------------------------------|
| 20  | 2   | V-212       | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                         |
| 19  | 1   | AN-114      | NAMEPLATE, BLANK, FOR VALVES WITH SPRINGS OR DETENTS                               |
| 18  | 4   | V-1         | SCREW, 10-24 X 2, SOCKET HEAD CAP                                                  |
| 17  | 2   | V-81        | SCREW, 8-32 X 5/16, SOCKET SET, FULL DOG POINT                                     |
| 16  | 1   | V-19        | PLUG, 1/8-27 NPT, 7/8 TAPER, FLUSH SEAL, SOCKET PIPE PLUG W/LOCTITE RED VIBRA-SEAL |
| 15  | 1   | PEC3-5      | END CAP, INDICATOR PIN, WIPER CAVITY, 6061-T6, 1/4" & 3/8" VALVE                   |
| 14  | 1   | V-570       | KNOB, BLACK (BRASS 1/4-20 INSERT), OS OPTION                                       |
| 13  | 1   | V-78        | U-CUP, 1/2 X 1/4 X 1/8, NITRILE                                                    |
| 12  | 1   | V-119       | RING, CIRCULAR PUSH ON TYPE FOR INDICATOR PIN                                      |
| 11  | 2   | AY-38EDL-11 | CLASSIC SOLENOID - ISO 4400 DIN, DUST EXCLUDER NUT, 120/60                         |
| 10  | 2   | V-85        | O-RING, BUNA-N, 70 DURO, AS-010, (REF 1/4 X 3/8 X 1/16), CLASSIC OVRD              |
| 9   | 2   | OS3         | SPRING - MANUAL OVERRIDE, "CLASSIC" SOLENOID                                       |
| 8   | 2   | OP3         | PIN - MANUAL OVERRIDE, 1/4" & 3/8" VALVES                                          |
| 7   | 1   | PB3-4E      | ADAPTOR - DBL SOL., W/OVERRIDE, 1/4" & 3/8" VALVES                                 |
| 6   | 1   | PBG3        | GASKET - PIGGY BACK, DOUBLE SOLENOID, 1/4" & 3/8" VALVE                            |
| 5   | 1   | AY-EY3G05   | ASSY - SPR CTR, FLOAT CTR SPL, MAN SPL OVRD, 1/4 & 3/8 VALVES                      |
| 4   | 8   | V-38        | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                                |
| 3   | 2   | ECG3        | GASKET - END CAP, 1/4" & 3/8" VALVE                                                |
| 2   | 6   | V-39        | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                                        |
| 1   | 1   | B2-6E       | BODY - SOLID, PIGGY BACK, ANODIZED, 1/4" SIDE PORT VALVE                           |
| FLG | QTY | PART NO     | DESCRIPTION                                                                        |