


POSITION GASKET ON END OF VALVE SO  
MOUNTING HOLES ALIGN  
BOTH ENDS (SIDE 'A' SHOWN)

#### NOTES:

- 1) ALWAYS GIVE VALVE MODEL, AND PART NUMBER WHEN ORDERING PARTS.
- 2) LUBRICATE DETENT BALL, SPRING AND CLEVIS.
- 3) APPLY ANTI-SEIZE COMPOUND LIGHTLY TO THE FIRST 1/4" OF THE SCREW THREAD. APPLICATION SHOULD BE AROUND THE THREAD OF THE SCREW.

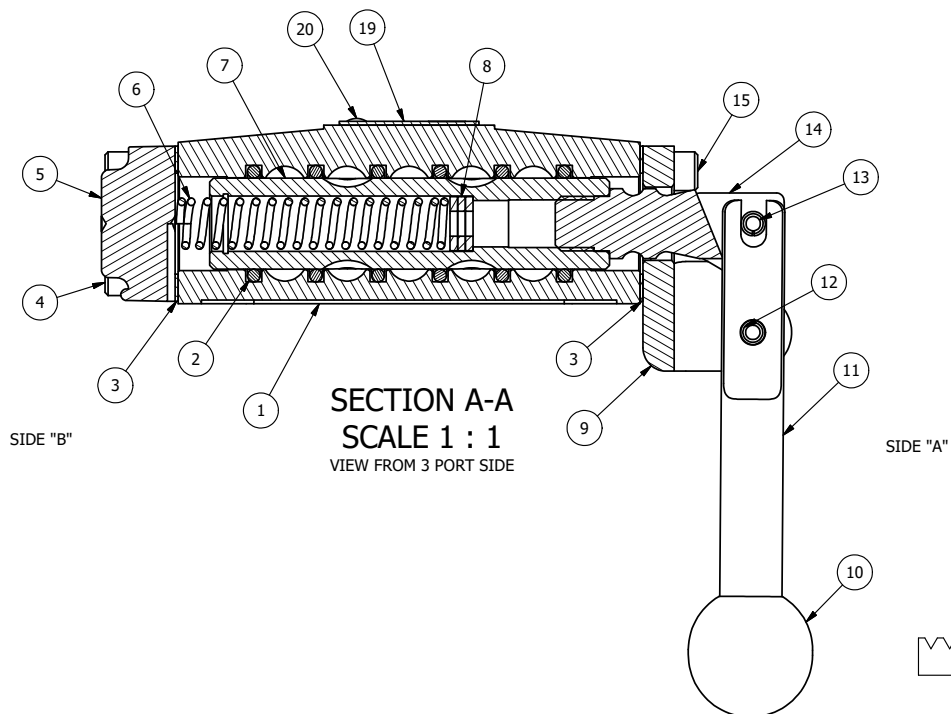

|     |     |          |   |
|-----|-----|----------|---|
| 20  | 2   | V-212    | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL              |
| 19  | 1   | AN-106   | NAMEPLATE, BLANK, STAINLESS STEEL                                       |
| 18  | 2   | V-21-SS  | SCREW, 1/4-20 X 3/16, SOCKET SET, CUP POINT, 18-8 SS                    |
| 17  | 2   | DS3-1    | SPRING, DETENT, STAINLESS, 1/4" & 3/8" VALVE. LEE SPRING # LC 029B 0 S. |
| 16  | 2   | V-14-SS  | BALL, 440C STAINLESS STEEL, 3/16 DIA. FOR DETENT                        |
| 15  | 4   | V-162-SS | SCREW, 10-24 X 5/8, SOCKET HEAD CAP, STAINLESS STEEL                    |
| 14  | 1   | HC3-189  | CLEVIS - HAND, STAINLESS, 189VY ACTION, 1/4" & 3/8" VALVE               |
| 13  | 1   | V-48-SS  | PIN, ROLL 3/16 X 9/16 18-8 STAINLESS                                    |
| 12  | 1   | V-508-SS | PIN, ROLL 3/16 X 5/8", 18-8 SS  |
| 11  | 1   | HL3-SS   | HAND LEVER, 303 STAINLESS STEEL, 1/4" & 3/8" VALVE                      |
| 10  | 1   | V-580    | KNOB, BLACK (BRASS 3/8-16 INSERT), 1" DIA BALL                          |
| 9   | 1   | HE3-5DD  | END CAP, LEVER, DOUBLE DETENT, 303 STAINLESS STEEL, 1/4" & 3/8" VALVE   |
| 8   | 3   | V-43     | WASHER - SPRING CTR, 302/304 STAINLESS STEEL, 1/4" & 3/8" VALVES        |
| 7   | 1   | SSH3-SS  | SPOOL - STANDARD, 2 POS, CLSD CTR, STAINLESS, 1/4" & 3/8" VALVE         |
| 6   | 1   | CS3-1    | SPRING - CENTERING, 1/4" & 3/8" VALVES                                  |
| 5   | 1   | SEC3-3   | END CAP, VENTED, STAINLESS STEEL, 1/4" & 3/8" VALVES                    |
| 4   | 4   | V-38-SS  | SCREW, 10-24 X 3/4, SOCKET HEAD CAP, 18-8 SS                            |
| 3   | 2   | ECG3     | GASKET - END CAP, 1/4" & 3/8" VALVE                                     |
| 2   | 6   | V-39     | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                             |
| 1   | 1   | B3-2-SS  | BODY - STAINLESS STEEL, PLAIN, NO PILOTS, 3/8" SIDE PORT VALVE          |
| FLG | QTY | PART NO  | DESCRIPTION   |

|  |                |   |  |
|--|----------------|---|--|
| LIMITS ON DIMENSIONS<br>UNLESS<br>OTHERWISE SPECIFIED  |                | 2-PL DECIMAL $\pm .01$<br>3-PL DECIMAL $\pm .005$<br>FRACTIONAL $\pm 1/64$<br>ANGULAR $\pm 1/2^\circ$ | <b>AAA PRODUCTS INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |
| DRAWN: RMckenna  | DATE: 4/3/2023 | CHECKED: KWalte   | DATE: 4/3/2023   |
| SCALE: 1 : 1   | SHEET: 1 OF 1  | RELEASED: HWomack   | DATE: 4/3/2023   |
| TITLE:<br><b>3/8" SIDE PORT, LEVER, 3 POS,<br/>DTNT C, CLSD SPR CTR FRM A,<br/>180D LVR, STAINLESS</b> |                | PART NO.:<br><b>HW3TSS</b>  | REV.:  |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

P:\Engineering\Product Valves Assembly\Level Hines\HW3TSS.dwg