

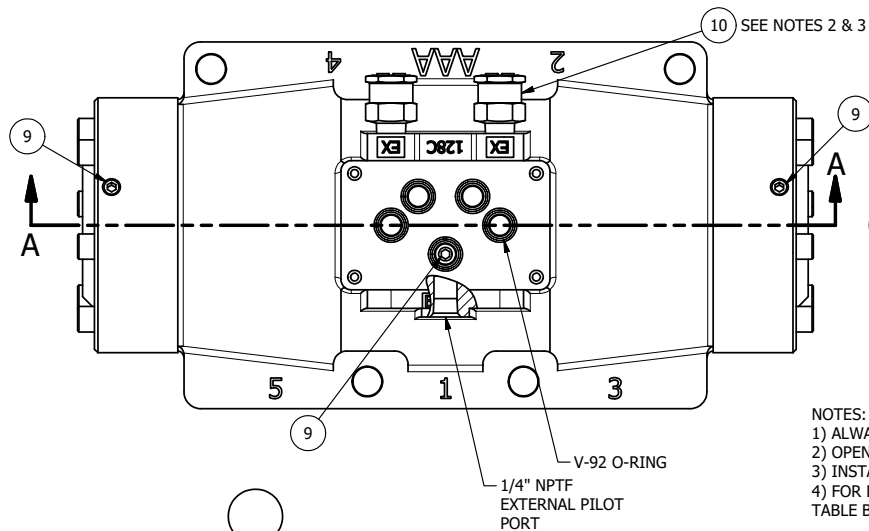


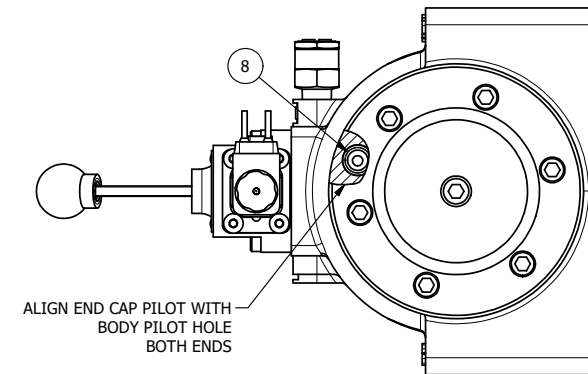

NOTES:


- 1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING.
- 2) OPEN MUFFLER 2 TURNS FROM CLOSED POSITION. TIGHTEN LOCK NUT ON MUFFLER.
- 3) INSTALL MUFFLER WITH MAGNALUBE-G GREASE 1 TO 1-1/2 TURNS FROM HAND TIGHT INTO BODY.
- 4) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE TOP CONTROL VALVE WITH VALVE LISTED IN TABLE BELOW.

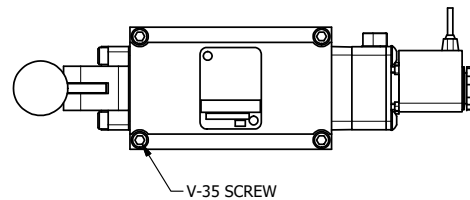


ALIGN END CAP PILOT WITH
BODY PILOT HOLE
BOTH ENDS

THE FOLLOWING PARTS ARE INCLUDED WITH THE SUBPLATE VALVE AND ARE USED TO ASSEMBLE.

QTY	PART NO	DESCRIPTION
5	V-92	O-RING, BUNA-N, 70 DURO, AS-014, (REF 1/2 X 5/8 X 1/16), 3/8" SUBPLATE
4	V-35	SCREW, 10-24 X 7/8, SOCKET HEAD CAP

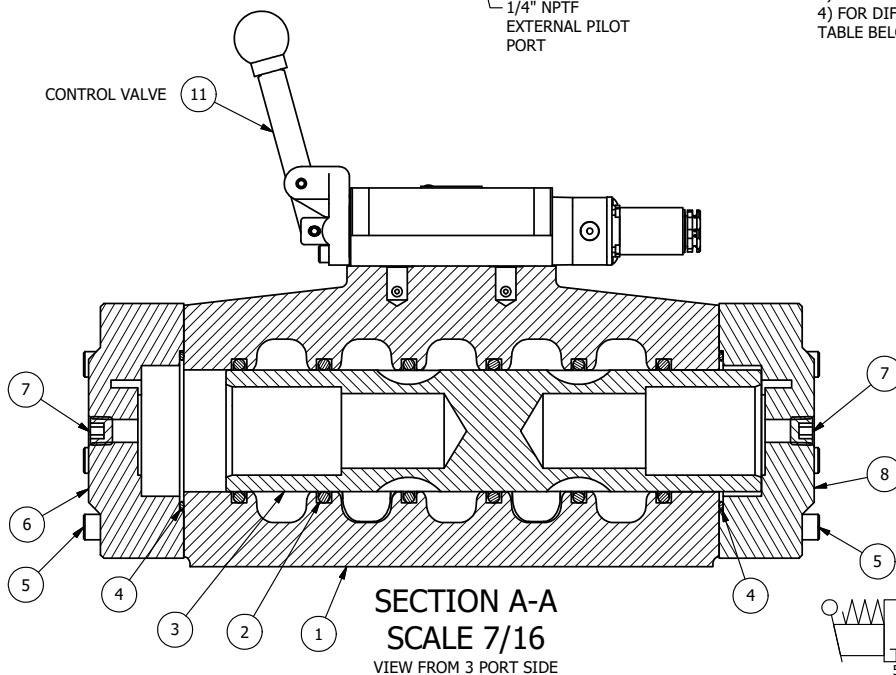

SECTION A-A
SCALE 7/16
VIEW FROM 3 PORT SIDE



COIL VOLTAGES	
PART NO	REPLACE WITH
ESAH12MOCZ 12VDC	ESAH3PMOC 12VDC
ESAH12MOCZ 24VDC	ESAH3PMOC 24VDC
ESAH12MOCZ 240/60	ESAH3PMOC 240/60

LIMITS ON DIMENSIONS UNLESS OTHERWISE SPECIFIED		2-PL DECIMAL $\pm .01$ 3-PL DECIMAL $\pm .005$ FRACTIONAL $\pm 1/64$ ANGULAR $\pm 1/2^\circ$	
DRAWN: RMckenna	DATE: 9/20/2026	CHECKED: KWalte	DATE: 9/20/2026
SCALE: 1/2	SHEET: 1 OF 1	RELEASED: HWomack	DATE: 9/20/2026
TITLE: 1-1/2" SIDE PORT, SNGL SOL, 2 POS, LVR ASSIST, FLYING LEAD, 120/60, LCKNG OVRD, SIDE VENT, EXT PILOT		PART NO.: ESAH12MOCZ	REV.:

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT