

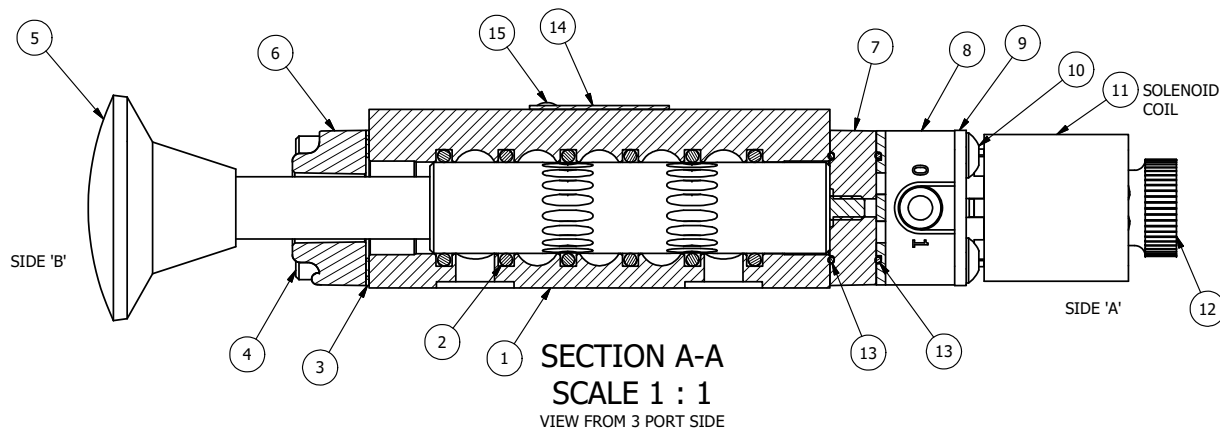
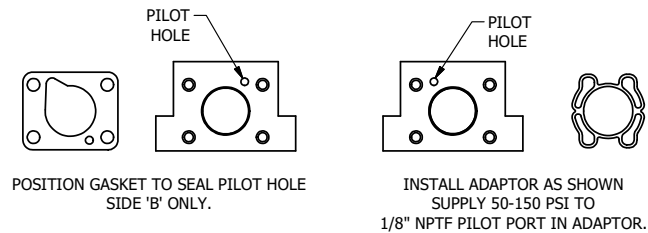


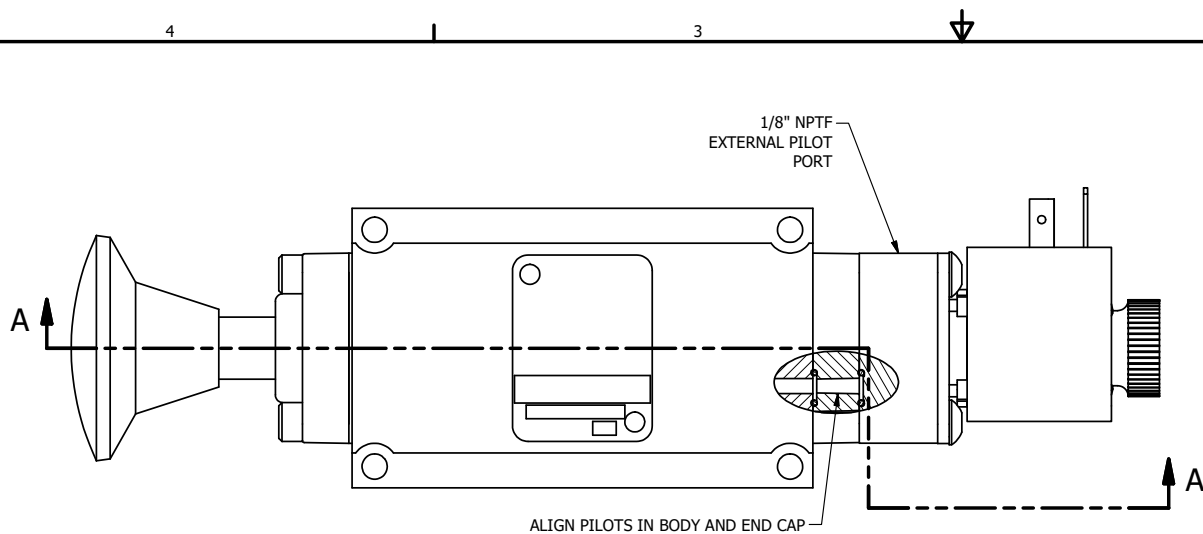

|     |     |          |                                                                              |
|-----|-----|----------|------------------------------------------------------------------------------|
| 15  | 2   | V-212    | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                   |
| 14  | 1   | AN-114   | NAMEPLATE, BLANK, FOR VALVES WITH SPRINGS OR DETENTS                         |
| 13  | 2   | EMG3     | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES                      |
| 12  | 1   | V-567W   | E SERIES SINTERED BRONZE MUFFLER, DUST EXCLUDER, V-613 LOCK WASHER           |
| 11  | 1   | V-603-1  | COIL HI-TEMP. 8-30T 120/60. NASS # 0558 55.1-00/7121.                        |
| 10  | 4   | V-601    | SCREW, 10-24 X 1-1/2, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES     |
| 9   | 1   | SEC3-7   | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS                      |
| 8   | 1   | V-550-1  | SOL OPER, END MOUNT, NON-LOCKING O/RIDE                                      |
| 7   | 1   | AY-ESAK3 | ASSY - NO DETENT, RTRN TO POS C, END MNT SOL W/PALM OVRD, 1/4" & 3/8" VALVES |
| 6   | 1   | PEC3-2   | END CAP, PALM, 380 AL, 1/4" & 3/8" VALVE                                     |
| 5   | 1   | V-71     | KNOB, BLACK, PALM, (BRASS 5/16-18 INSERT), 1-13/16 DIA X 1-3/8 HEIGHT        |
| 4   | 4   | V-38     | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                          |
| 3   | 1   | ECG3     | GASKET - END CAP, 1/4" & 3/8" VALVE                                          |
| 2   | 6   | V-39     | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                                  |
| 1   | 1   | BP3-1E   | BODY - SOLID, BUTTON BLEEDER, ANODIZED, 3/8" SUBPLATE VALVE                  |
| FLG | QTY | PART NO  | DESCRIPTION                                                                  |

- NOTES:  
 1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
 2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID COIL WITH COIL LISTED IN TABLE BELOW.



| COIL VOLTAGES   |              |
|-----------------|--------------|
| PART NO         | REPLACE COIL |
| ESAK3PHLZ 12VDC | V-603-2      |

|                                                                                                            |                |                                                                                                       |                                                                                |
|------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| LIMITS ON DIMENSIONS<br>UNLESS<br>OTHERWISE SPECIFIED                                                      |                | 2-PL DECIMAL $\pm .01$<br>3-PL DECIMAL $\pm .005$<br>FRACTIONAL $\pm 1/64$<br>ANGULAR $\pm 1/2^\circ$ | <b>AAA PRODUCTS INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |
| DRAWN: RMckenna                                                                                            | DATE: 9/7/2026 | CHECKED: KWalte                                                                                       | DATE: 9/7/2026                                                                 |
| SCALE: 1 : 1                                                                                               | SHEET: 1 OF 1  | RELEASED: HWomack                                                                                     | DATE: 9/7/2026                                                                 |
| TITLE:<br>3/8" SUBPLATE, SNGL SOL, 2 POS,<br>SPR RTRN, PALM, H-TMP COIL, 120/60,<br>DUST EXCLDR, EXT PILOT |                | PART NO.:<br>ESAK3PHLZ                                                                                | REV.:                                                                          |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT