




4

3


2

1

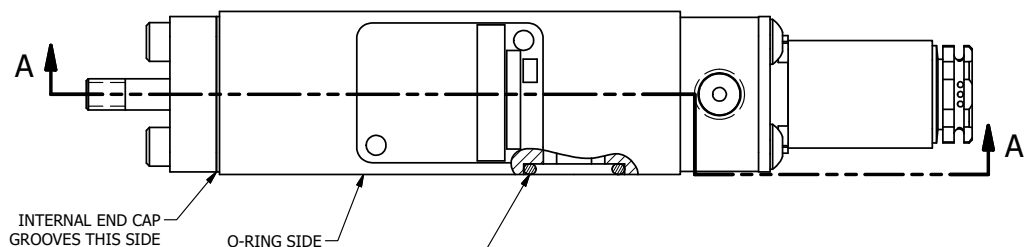

## NOTES:

- 1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID COIL WITH COIL LISTED IN TABLE BELOW.

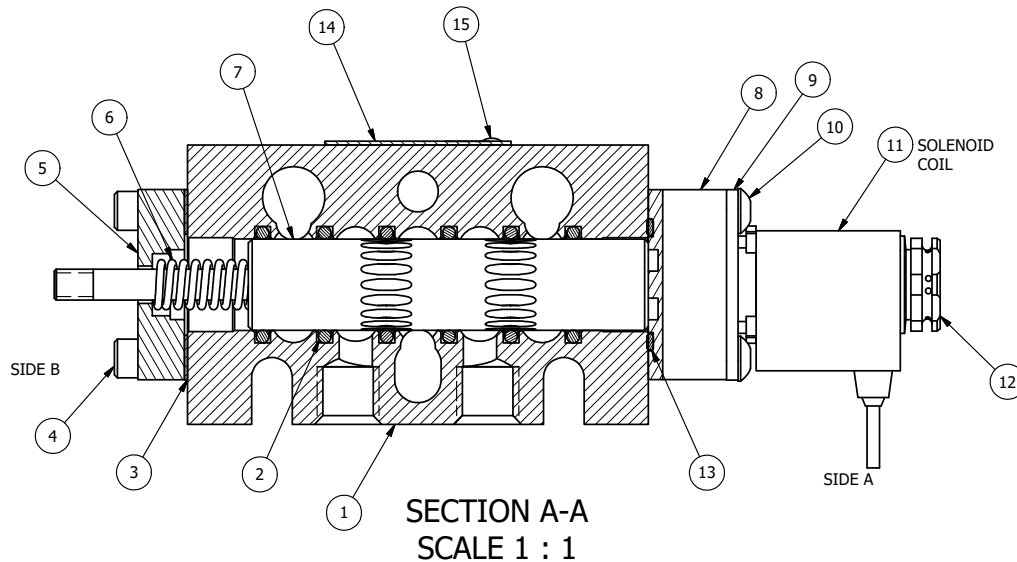

|     |     |           |                                                                                         |
|-----|-----|-----------|-----------------------------------------------------------------------------------------|
| 16  | 3   | V-110     | O-RING, BUNA-N, 70 DURO, AS-114, (REF 5/8 X 13/16 X 3/32), 1/4" SLEEVE, 1/2" SUB, STACK |
| 15  | 2   | V-212     | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                              |
| 14  | 1   | AN-114    | NAMEPLATE, BLANK, FOR VALVES WITH SPRINGS OR DETENTS                                    |
| 13  | 1   | EMG3      | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES                                 |
| 12  | 1   | V-562     | NUT, SOLENOID, SIDE EXHAUST                                                             |
| 11  | 1   | V-569-1   | SYSTEM 8 COIL 120 50/60.NASS # 0561 38.1 00/4984.                                       |
| 10  | 4   | V-584     | SCREW, 10-24 X 1, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES                    |
| 9   | 1   | SEC3-7    | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS                                 |
| 8   | 1   | V-550-1   | SOL OPER, END MOUNT, NON-LOCKING O/RIDE                                                 |
| 7   | 1   | AY-S3-SIK | ASSEMBLY - SPOOL INDICATOR, THREADED, 1/4" & 3/8" VALVE                                 |
| 6   | 1   | CS3       | SPRING - RETURN, (EXCEPT HO, KO & PO) 1/4" & 3/8" VALVES                                |
| 5   | 1   | PEC3-5    | END CAP, INDICATOR PIN, WIPER CAVITY, 6061-T6, 1/4" & 3/8" VALVE                        |
| 4   | 4   | V-38      | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                                     |
| 3   | 1   | ECG3      | GASKET - END CAP, 1/4" & 3/8" VALVE                                                     |
| 2   | 6   | V-39      | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                                             |
| 1   | 1   | B2-10E    | FINISHED - SOLID BODY, UPPER PILOTS, 1/4" STACKING VALVE                                |
| FLG | QTY | PART NO   | DESCRIPTION                                                                             |

LIMITS ON DIMENSIONS  
UNLESS  
OTHERWISE SPECIFIED

2-PL DECIMAL ± .01  
3-PL DECIMAL ± .005  
FRACTIONAL ± 1/64  
ANGULAR ± 1/2°



**AAA PRODUCTS  
INTERNATIONAL**  
7114 Harry Hines Blvd  
Dallas, TX 75235

DRAWN: RMckenna

DATE: 7/31/2026

CHECKED: KWalte

DATE: 7/31/2026

SCALE: 1 : 1

SHEET: 1 OF 1


RELEASED: HWomack

DATE: 7/31/2026

TITLE:  
1/4" STACK, SNGL SOL, 2 POS,  
SPR RTRN, FLYING LEAD, 120/60,  
SOL SIDE VENT, THD PIN, EXT PILOT

PART NO.:  
EBSO2MCKZ

REV.:



| COIL VOLTAGES    |              |
|------------------|--------------|
| PART NO          | REPLACE COIL |
| EBSO2MCKZ 12VDC  | V-569-2      |
| EBSO2MCKZ 24VDC  | V-569-3      |
| EBSO2MCKZ 240/60 | V-569-4      |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

D:\Engineering\Product Valves Assembly\Standard\SOLOWG\EBSO2MCKZ.dwg