

4

3

2


1

B


B

A

A

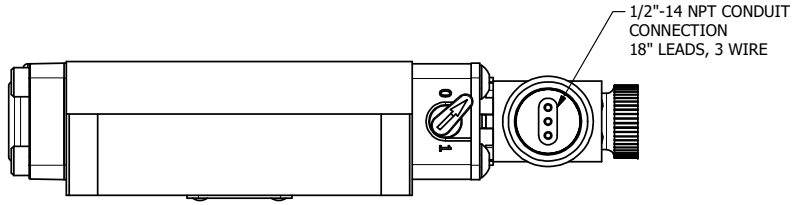

1/2"-14 NPT CONDUIT CONNECTION  
18" LEADS, 3 WIRE

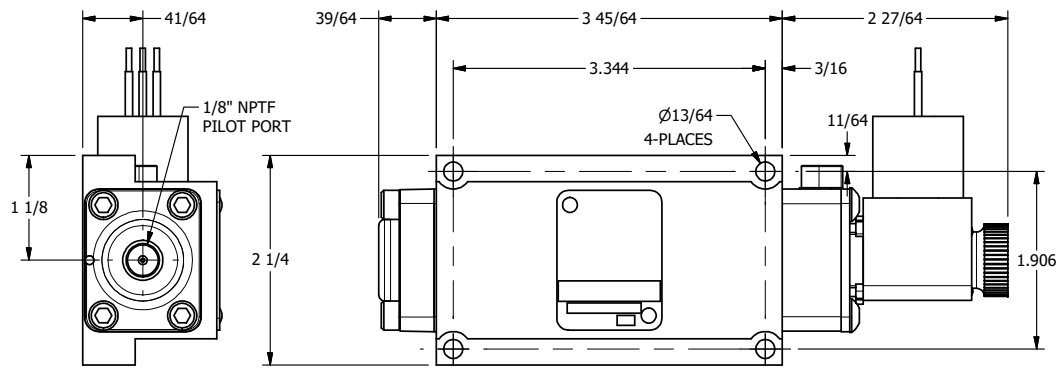

41/64

39/64

3 45/64

2 27/64

1/8" NPTF  
PILOT PORT


Ø13/64  
4-PLACES

11/64

1 1/8


2 1/4

1.906

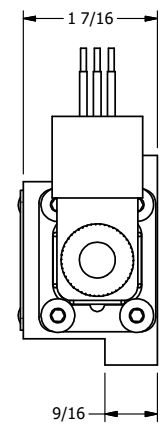

1 7/16

9/16

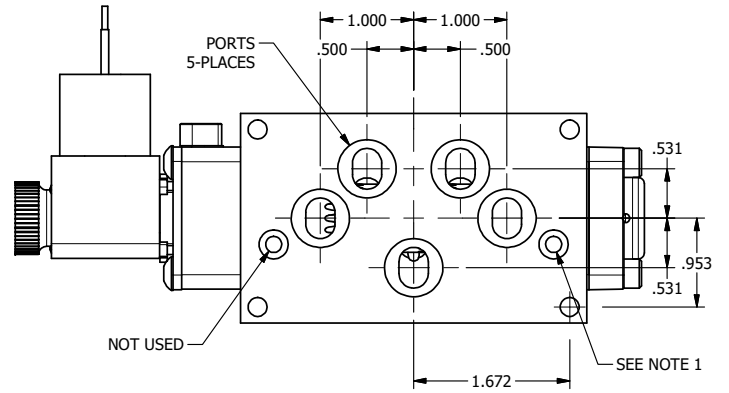

PORTS  
5-PLACES

1.000 1.000  
.500 .500

NOT USED

SEE NOTE 1


1.672

.531


.953

.531

NOTES:  
1) REMOTE PILOT CAN BE ROUTED THROUGH SUBPLATE CONNECTION.

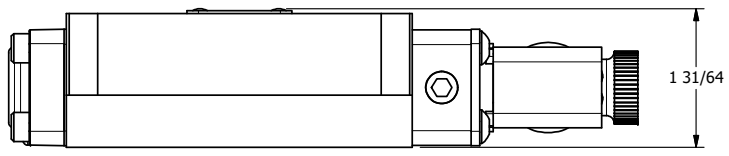

1 31/64



(B) (A)  
4 2

5 1 3

(EB) (P) (EA)

**AAA**  
PRODUCTS  
INTERNATIONAL

**AAA PRODUCTS  
INTERNATIONAL**  
7114 Harry Hines Blvd  
Dallas, TX 75235

TITLE 3/8" SUBPLATE, SNGL SOL, 2 POS,  
PILOT RTRN, MOLD-OVER,  
LCKNG OVRD, DUST EXCLDR

DRAWING NO.:  
DIM\_ESR3PJOL

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

4

3

2

