
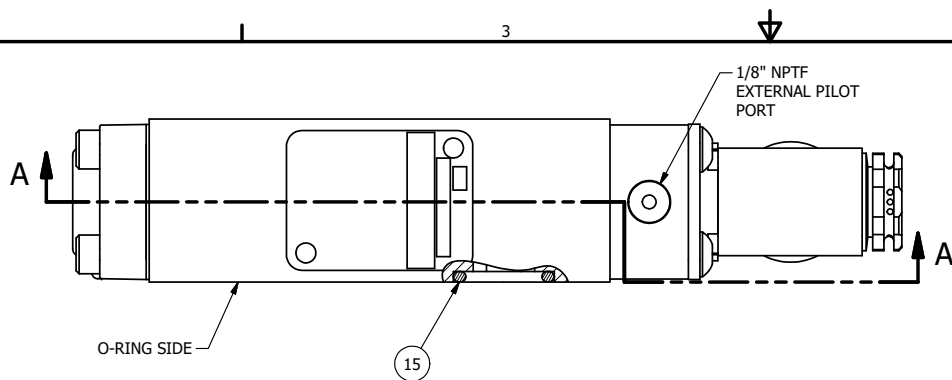


POSITION GASKET ON END OF VALVE  
TO SEAL PILOT HOLE  
SIDE 'B' ONLY

ALIGN PILOT AND SLOT IN ADAPTOR  
WITH GASKET IN BETWEEN, SIDE 'A' ONLY  
(ADAPTOR SHOULD BE INSTALLED AS SHOWN)  
SUPPLY 50-150 PSI TO 1/8" NPTF PILOT PORT IN ADAPTOR.

NOTES:  
1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID COIL WITH COIL LISTED IN TABLE BELOW.

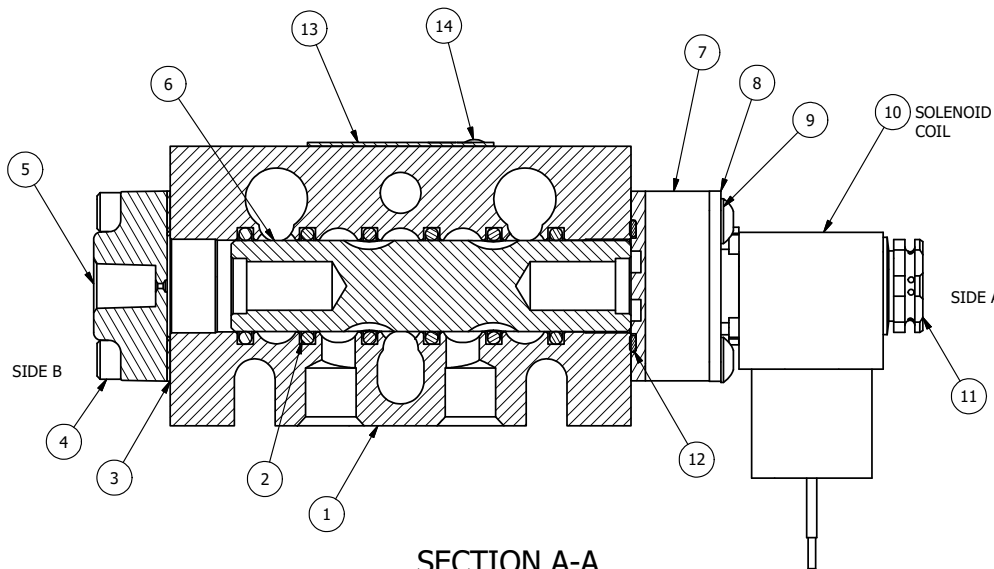

|     |     |         |                                                                                         |
|-----|-----|---------|-----------------------------------------------------------------------------------------|
| 15  | 3   | V-110   | O-RING, BUNA-N, 70 DURO, AS-114, (REF 5/8 X 13/16 X 3/32), 1/4" SLEEVE, 1/2" SUB, STACK |
| 14  | 2   | V-212   | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                              |
| 13  | 1   | AN-115  | NAMEPLATE, BLANK, FOR HE,KE,RR,D,CR,PP,SR,SS VALVES                                     |
| 12  | 1   | EMG3    | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES                                 |
| 11  | 1   | V-562   | NUT, SOLENOID, SIDE EXHAUST                                                             |
| 10  | 1   | V-600-1 | COIL - 1/2 NPTF HUB 120V 50/60HZ, NASS P/N 0561 44.1-00/4984                            |
| 9   | 4   | V-584   | SCREW, 10-24 X 1, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES                    |
| 8   | 1   | SEC3-7  | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS                                 |
| 7   | 1   | V-550-1 | SOL OPER, END MOUNT, NON-LOCKING O'RIDE                                                 |
| 6   | 1   | S3R     | SPOOL - SOLID, STANDARD, 2 POS, CLSD CTR, 1/4" & 3/8" VALVE                             |
| 5   | 1   | PEC3    | END CAP, PILOT, 380 AL, 1/4" & 3/8" VALVE                                               |
| 4   | 4   | V-38    | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                                     |
| 3   | 1   | ECG3    | GASKET - END CAP, 1/4" & 3/8" VALVE                                                     |
| 2   | 6   | V-39    | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                                             |
| 1   | 1   | B2-10E  | FINISHED - SOLID BODY, UPPER PILOTS, 1/4" STACKING VALVE                                |
| FLG | QTY | PART NO | DESCRIPTION                                                                             |

LIMITS ON DIMENSIONS  
UNLESS  
OTHERWISE SPECIFIED

2-PL DECIMAL ± .01  
3-PL DECIMAL ± .005  
FRACTIONAL ± 1/64  
ANGULAR ± 1/2°

**AAA**  
PRODUCTS  
INTERNATIONAL

**AAA PRODUCTS  
INTERNATIONAL**  
7114 Harry Hines Blvd  
Dallas, TX 75235

DRAWN: RMckenna    DATE: 9/21/2026

CHECKED: KWalte    DATE: 9/21/2026


SCALE: 1 : 1    SHEET: 1 OF 1

RELEASED: HWomack    DATE: 9/21/2026

TITLE:  
**1/4" STACK, SNGL SOL, 2 POS,  
PILOT RTRN, MOLD-OVER, 120/60,  
SOL SIDE VENT, EXT PILOT**

PART NO.:  
**EBSR2JCZ**

REV.:



| COIL VOLTAGES   |              |
|-----------------|--------------|
| PART NO         | REPLACE COIL |
| EBSR2JCZ 12VDC  | V-600-2      |
| EBSR2JCZ 24VDC  | V-600-3      |
| EBSR2JCZ 240/60 | V-600-4      |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT