

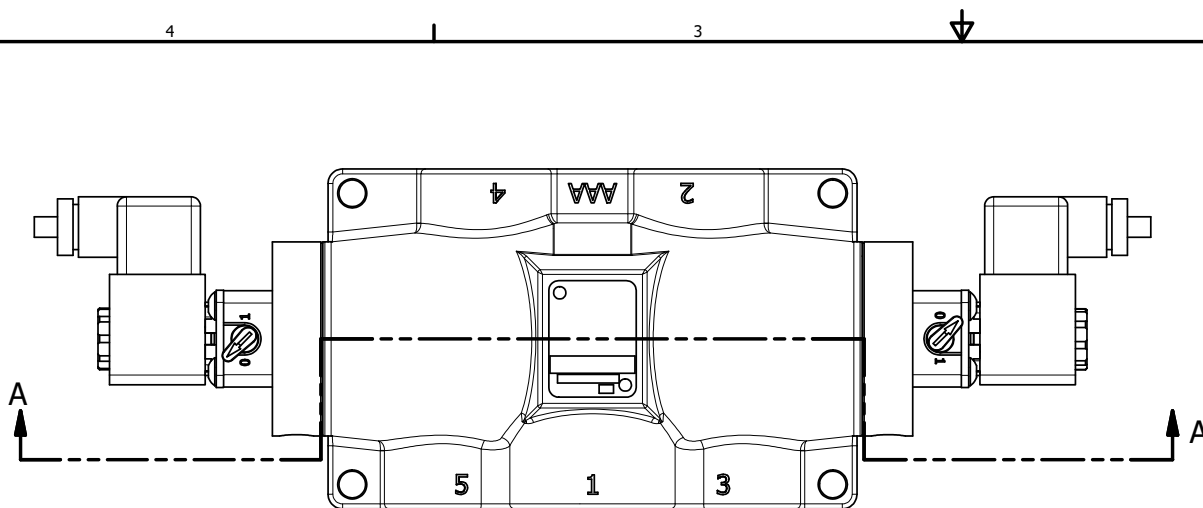


POSITION GASKET TO SEAL PILOT HOLE, BOTH SIDES.  
THE ROUND ALUMINUM ADAPTOR IS ROTATED 90 DEGREES.  
SUPPLY 50-160 PSI TO 1/8" NPTF PILOT PORT IN ADAPTOR.

NOTES:  
1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.

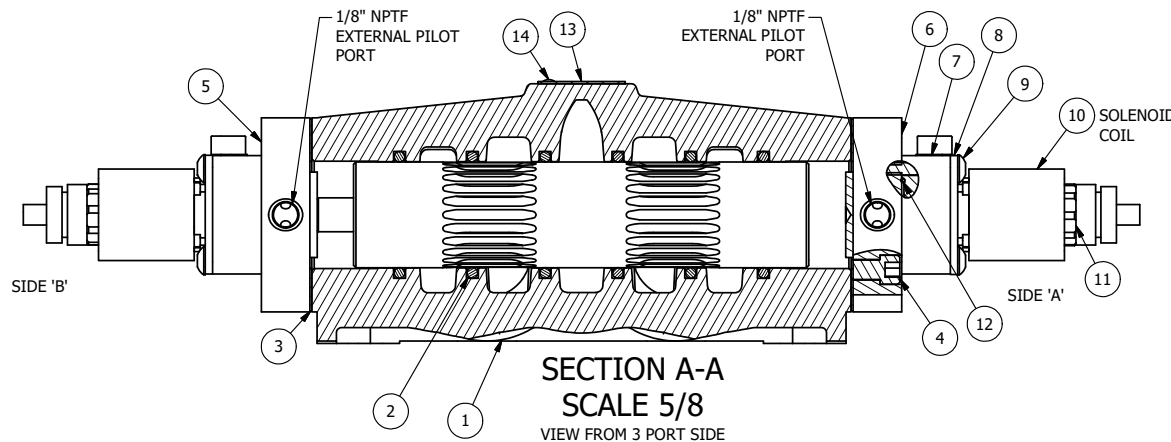

SECTION A-A  
SCALE 5/8  
VIEW FROM 3 PORT SIDE



|     |     |          |                                                                              |
|-----|-----|----------|------------------------------------------------------------------------------|
| 14  | 2   | V-212    | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                   |
| 13  | 1   | AN-114   | NAMEPLATE, BLANK, FOR VALVES WITH SPRINGS OR DETENTS                         |
| 12  | 2   | EMG3     | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES                      |
| 11  | 2   | V-556    | NUT, SOLENOID, TOP EXHAUST, KNURLED                                          |
| 10  | 2   | V-612-3  | ATEX COIL 24 VDC WITH 3 METER CORD. NASS # 1215 30.1-001/6896.               |
| 9   | 8   | V-584    | SCREW, 10-24 X 1, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES         |
| 8   | 2   | SEC3-7   | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS                      |
| 7   | 2   | V-599-1  | SOL OPER, END MOUNT, LOCKING O'RIDE                                          |
| 6   | 1   | SSA48-1E | ADAPTOR, END MNT SOLENOID, 1/2", 3/4" & 1" VALVE                             |
| 5   | 1   | AY-ESY8G | ASSY - SPR CTR, FLOAT CTR SPOOL, END MOUNT SOLENOID, 3/4" & 1" VALVES        |
| 4   | 8   | V-46     | SCREW, 1/4-20 X 3/4, SOCKET HEAD CAP                                         |
| 3   | 2   | ECG48    | GASKET - END CAP, 1/2", 3/4" & 1" VALVE                                      |
| 2   | 6   | V-30     | O-RING, BUNA-N, 70 DURO, AS-220, (REF 1-3/8 X 1-5/8 X 1/8), 3/4" & 1" VALVES |
| 1   | 1   | B8-1     | BODY, 1" SIDE PORT, UPPER PILOTS, ANODIZED                                   |
| FLG | QTY | PART NO  | DESCRIPTION                                                                  |

|                                                                                               |                 |                                                                                  |                 |                                                                                |       |
|-----------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------|-------|
| LIMITS ON DIMENSIONS<br>UNLESS<br>OTHERWISE SPECIFIED                                         |                 | 2-PL DECIMAL ± .01<br>3-PL DECIMAL ± .005<br>FRACTIONAL ± 1/64<br>ANGULAR ± 1/2° |                 | <b>AAA PRODUCTS INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |       |
| DRAWN: RMckenna                                                                               | DATE: 9/14/2026 | CHECKED: KWalte                                                                  | DATE: 9/14/2026 |                                                                                |       |
| SCALE: 1 : 1                                                                                  | SHEET: 1 OF 1   | RELEASED: HWomack                                                                | DATE: 9/14/2026 |                                                                                |       |
| TITLE:<br>1" SIDE PORT, DBL SOL, 3 POS,<br>FLOAT SPR CTR, ATEX, 24VDC,<br>LCKNG OVRD, EXT PLT |                 |                                                                                  |                 | PART NO.:<br>ESY8GTOZ 24VDC                                                    | REV.: |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT