



4


3

2


1

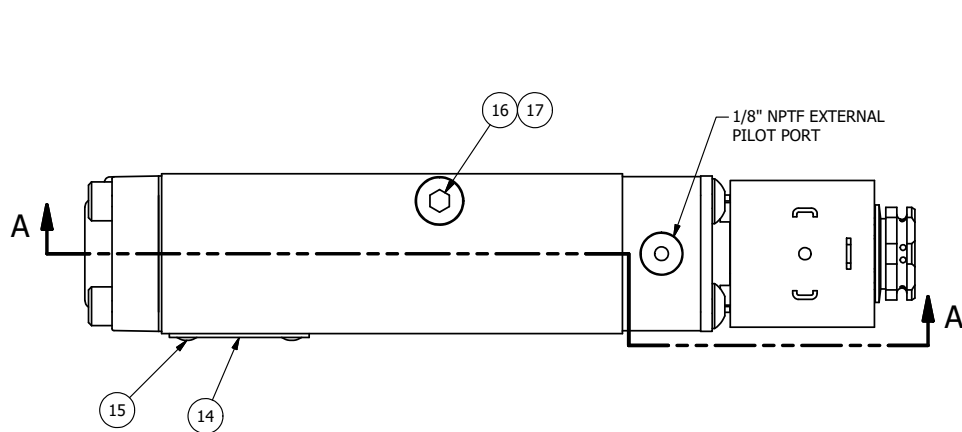

POSITION GASKET TO SEAL PILOT HOLE ON SIDE 'B' ONLY.




ALIGN PILOT AND SLOT IN ADAPTOR WITH GASKET IN BETWEEN, SIDE 'A' ONLY (ADAPTOR SHOULD BE INSTALLED AS SHOWN) SUPPLY 50-150 PSI TO 1/8" NPTF PILOT PORT IN ADAPTOR.

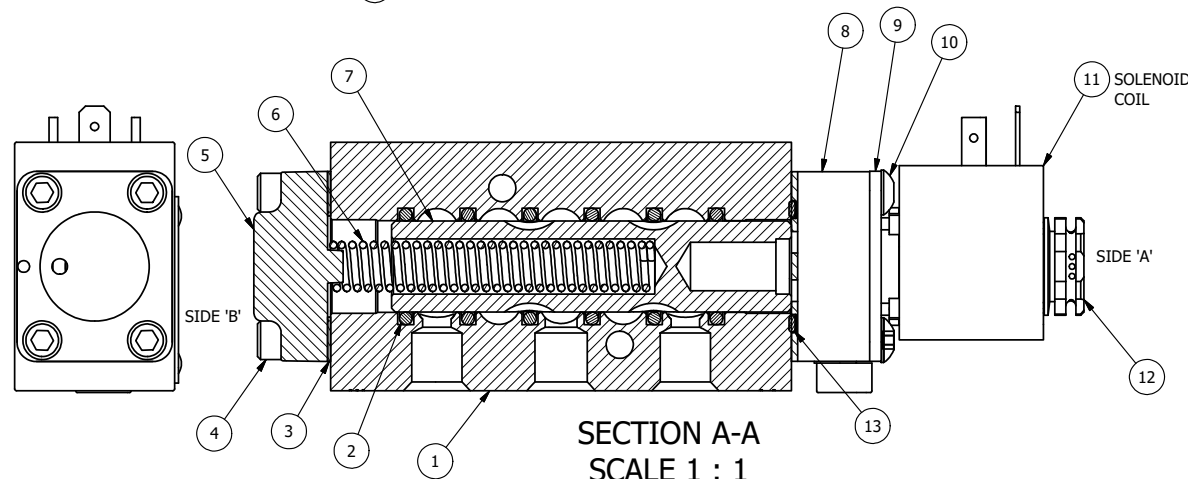

|     |     |          |                                                                      |
|-----|-----|----------|----------------------------------------------------------------------|
| 18  | 1   | NSPK-2   | KIT - SUBPLATE MOUNTING, NAMUR VALVES                                |
| 17  | 1   | V-548    | O-RING, BUNA-N, 70 DURO, 6MM X 1MM, NAMUR PLUG                       |
| 16  | 1   | V-547    | PLUG, 360 HALF HARD BRASS, NAMUR VALVE                               |
| 15  | 2   | V-212    | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL           |
| 14  | 1   | AN-114   | NAMEPLATE, BLANK, FOR VALVES WITH SPRINGS OR DETENTS                 |
| 13  | 1   | EMG3     | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES              |
| 12  | 1   | V-562    | NUT, SOLENOID, SIDE EXHAUST                                          |
| 11  | 1   | V-603-1  | COIL HI-TEMP. 8-30T 120/60. NASS # 0558 55.1-00/7121.                |
| 10  | 4   | V-584    | SCREW, 10-24 X 1, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES |
| 9   | 1   | SEC3-7   | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS              |
| 8   | 1   | V-599-1  | SOL OPER, END MOUNT, LOCKING O'RIDE                                  |
| 7   | 1   | S3       | SPOOL - STANDARD, 2 POS, CLSD CTR, 1/4" & 3/8" VALVE                 |
| 6   | 1   | CS3      | SPRING - RETURN, (EXCEPT HO, KO & PO) 1/4" & 3/8" VALVES             |
| 5   | 1   | SEC3-A   | END CAP, VENTED, SPRING BOSS, 380 AL, 1/4" & 3/8" VALVE              |
| 4   | 4   | V-38     | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                  |
| 3   | 1   | ECG3     | GASKET - END CAP, 1/4" & 3/8" VALVE                                  |
| 2   | 6   | V-39     | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                          |
| 1   | 1   | B2-11E-W | NAMUR INTERFACE, WITH 3/2 CONVERSION, 1/4" VALVE                     |
| FLG | QTY | PART NO  | DESCRIPTION                                                          |

NOTES:

- 1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.
- 2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID COIL WITH COIL LISTED IN TABLE BELOW.



| COIL VOLTAGES  |              |
|----------------|--------------|
| PART NO        | REPLACE COIL |
| NS02HOCZ 12VDC | V-603-2      |

|                                                                                                              |                 |                                                                                  |                                                                                |
|--------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| LIMITS ON DIMENSIONS UNLESS OTHERWISE SPECIFIED                                                              |                 | 2-PL DECIMAL ± .01<br>3-PL DECIMAL ± .005<br>FRACTIONAL ± 1/64<br>ANGULAR ± 1/2° | <b>AAA PRODUCTS INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |
| DRAWN: RMckenna                                                                                              | DATE: 7/15/2026 | CHECKED: KWalte                                                                  | DATE: 7/15/2026                                                                |
| SCALE: 1 : 1                                                                                                 | SHEET: 1 OF 1   | RELEASED: HWomack                                                                | DATE: 7/15/2026                                                                |
| TITLE:<br>1/4" NAMUR, SGL SOL, 2 POS,<br>SPR RTRN, HIGH TMP COIL, 120/60,<br>LCKN OVRD, SIDE VENT, EXT PILOT |                 | PART NO.:<br>NS02HOCZ                                                            | REV.:                                                                          |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

P:\Engineering\Product Valves Assembly\Standard\NS02HOCZ.dwg