

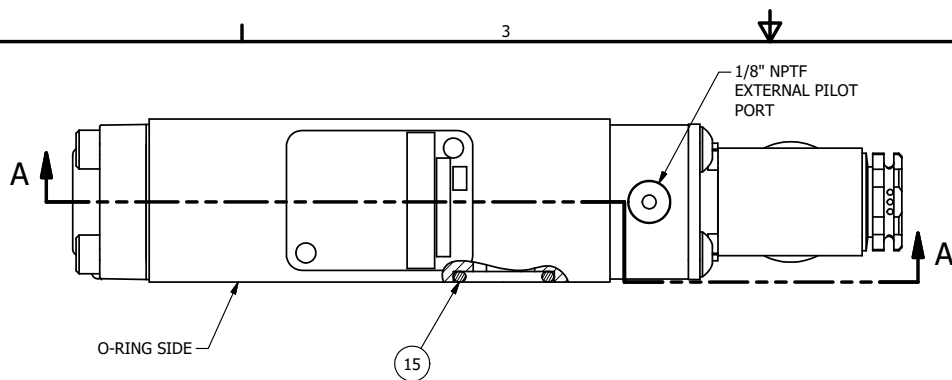



POSITION GASKET ON END OF VALVE  
TO SEAL PILOT HOLE  
SIDE 'B' ONLY



ALIGN PILOT AND SLOT IN ADAPTOR  
WITH GASKET IN BETWEEN, SIDE 'A' ONLY  
(ADAPTOR SHOULD BE INSTALLED AS SHOWN)  
SUPPLY 50-150 PSI TO 1/8" NPTF PILOT PORT IN ADAPTOR.


NOTES:  
1) ALWAYS GIVE VALVE MODEL AND PART NUMBER WHEN ORDERING PARTS.  
2) FOR DIFFERENT VOLTAGES OTHER THAN 120/60, REPLACE SOLENOID COIL WITH COIL LISTED IN TABLE BELOW.

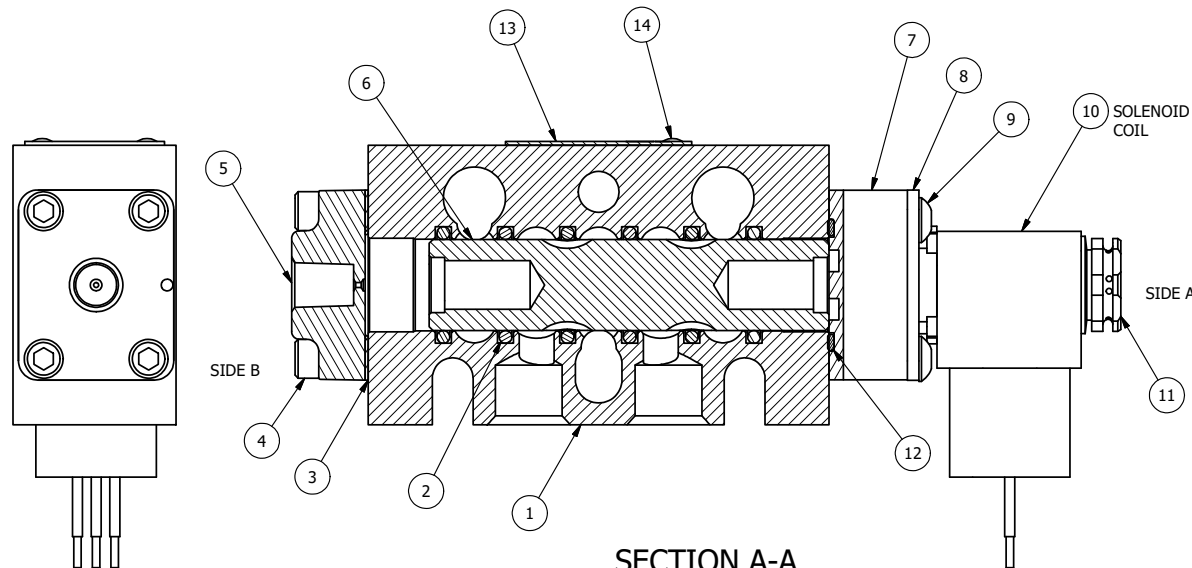

SECTION A-A  
SCALE 1 : 1

|     |     |         |                                                                                         |
|-----|-----|---------|-----------------------------------------------------------------------------------------|
| 15  | 3   | V-110   | O-RING, BUNA-N, 70 DURO, AS-114, (REF 5/8 X 13/16 X 3/32), 1/4" SLEEVE, 1/2" SUB, STACK |
| 14  | 2   | V-212   | SCREW, #2 X 3/16 DRIVE, TYPE U, OVAL HEAD, STAINLESS STEEL                              |
| 13  | 1   | AN-115  | NAMEPLATE, BLANK, FOR HE,KE,RR,D,CR,PP,SR,SS VALVES                                     |
| 12  | 1   | EMG3    | GASKET - END MOUNT SOLENOID, BUNA-N, 1/4" & 3/8" VALVES                                 |
| 11  | 1   | V-562   | NUT, SOLENOID, SIDE EXHAUST                                                             |
| 10  | 1   | V-600-1 | COIL - 1/2 NPTF HUB 120V 50/60HZ, NASS P/N 0561 44.1-00/4984                            |
| 9   | 4   | V-584   | SCREW, 10-24 X 1, BUTTON HEAD SOCKET CAP, W/ND 593 BLUE MICROSPHERES                    |
| 8   | 1   | SEC3-7  | PLATE, RE-INFORCEMENT, SOLENOID, STAMPED, 304 STAINLESS                                 |
| 7   | 1   | V-550-1 | SOL OPER, END MOUNT, NON-LOCKING O'RIDE                                                 |
| 6   | 1   | S3R     | SPOOL - SOLID, STANDARD, 2 POS, CLSD CTR, 1/4" & 3/8" VALVE                             |
| 5   | 1   | PEC3    | END CAP, PILOT, 380 AL, 1/4" & 3/8" VALVE                                               |
| 4   | 4   | V-38    | SCREW, 10-24 X 3/4, SOCKET HEAD CAP                                                     |
| 3   | 1   | ECG3    | GASKET - END CAP, 1/4" & 3/8" VALVE                                                     |
| 2   | 6   | V-39    | O-RING, VITON, STD BODY, 1/4" & 3/8" VALVES                                             |
| 1   | 1   | B3-10E  | FINISHED - SOLID BODY, UPPER PILOTS, 3/8" STACKING VALVE                                |
| FLG | QTY | PART NO | DESCRIPTION                                                                             |

|                                                                                                      |  |                                                                                  |  |                                                                                                                                                                          |  |
|------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LIMITS ON DIMENSIONS<br>UNLESS<br>OTHERWISE SPECIFIED                                                |  | 2-PL DECIMAL ± .01<br>3-PL DECIMAL ± .005<br>FRACTIONAL ± 1/64<br>ANGULAR ± 1/2° |  |  <b>AAA PRODUCTS<br/>INTERNATIONAL</b><br>7114 Harry Hines Blvd<br>Dallas, TX 75235 |  |
| DRAWN: RMcKenna                                                                                      |  | DATE: 9/21/2026                                                                  |  | CHECKED: KWaite                                                                                                                                                          |  |
| SCALE: 1 : 1                                                                                         |  | SHEET: 1 OF 1                                                                    |  | RELEASED: HWomack                                                                                                                                                        |  |
| TITLE:<br>3/8" STACK, SNGL SOL, 2 POS,<br>PILOT RTRN, MOLD-OVER, 120/60,<br>SOL SIDE VENT. EXT PILOT |  |                                                                                  |  | PART NO.:<br>EBSR3JCZ                                                                                                                                                    |  |
|                                                                                                      |  |                                                                                  |  | REV.:                                                                                                                                                                    |  |



| COIL VOLTAGES   |              |
|-----------------|--------------|
| PART NO         | REPLACE COIL |
| EBSR3JCZ 12VDC  | V-600-2      |
| EBSR3JCZ 24VDC  | V-600-3      |
| EBSR3JCZ 240/60 | V-600-4      |

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO AAA PRODUCTS AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT